


Deep Groove Ball Bearing

6000 Series-6015 ZZ,6015 RS,6015

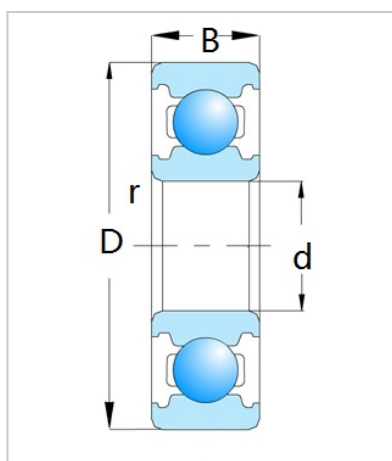

Bearing Designation

Open	6015
RS	6015 RS
ZZ	6015 ZZ
Dimension [mm]	
d	75
D	115
B	20
rs min	1.1
Basic load ratings (kN)	
Cr	39.5
Cor	33.5
Speed ratings(rpm)	
Grease	5700
Oil	6700
Weight	
(Kg)	0.649

Main dimensions according to DIN 625-1. Ball bearings of the extra-light 60 series can still support radial loads despite their low weight. Compared to deep groove ball bearings of the 63 medium series they require a smaller installation space at the same inside diameter, only weigh half of them and allow higher speeds.

A standard internal clearance (CN) is suitable for the operation of the bearing in case of ordinary temperatures and for customary fits. An increased internal clearance (C3) is recommendable in case of high temperature gradients between the rings or in case of fixing the bearing through a press fit.

Seals

Plastic seals (RS/2RS) have the optimum sealing action with increased friction. Metal seals (Z/ZZ) are suitable for higher speeds, but they have a limited sealing action as they seal contactless. Open, seal-less bearings are suitable for extremely high speeds and - furthermore - they can be regreased more easily. However, they are more susceptible to soiling.

Luoyang Auto Bearing Co.,Ltd-Tel:0598-3607100-Email:moore@lyautobearing.com-http://www.auto-bearing.com